


SHEERWEAVE | 4903 3%

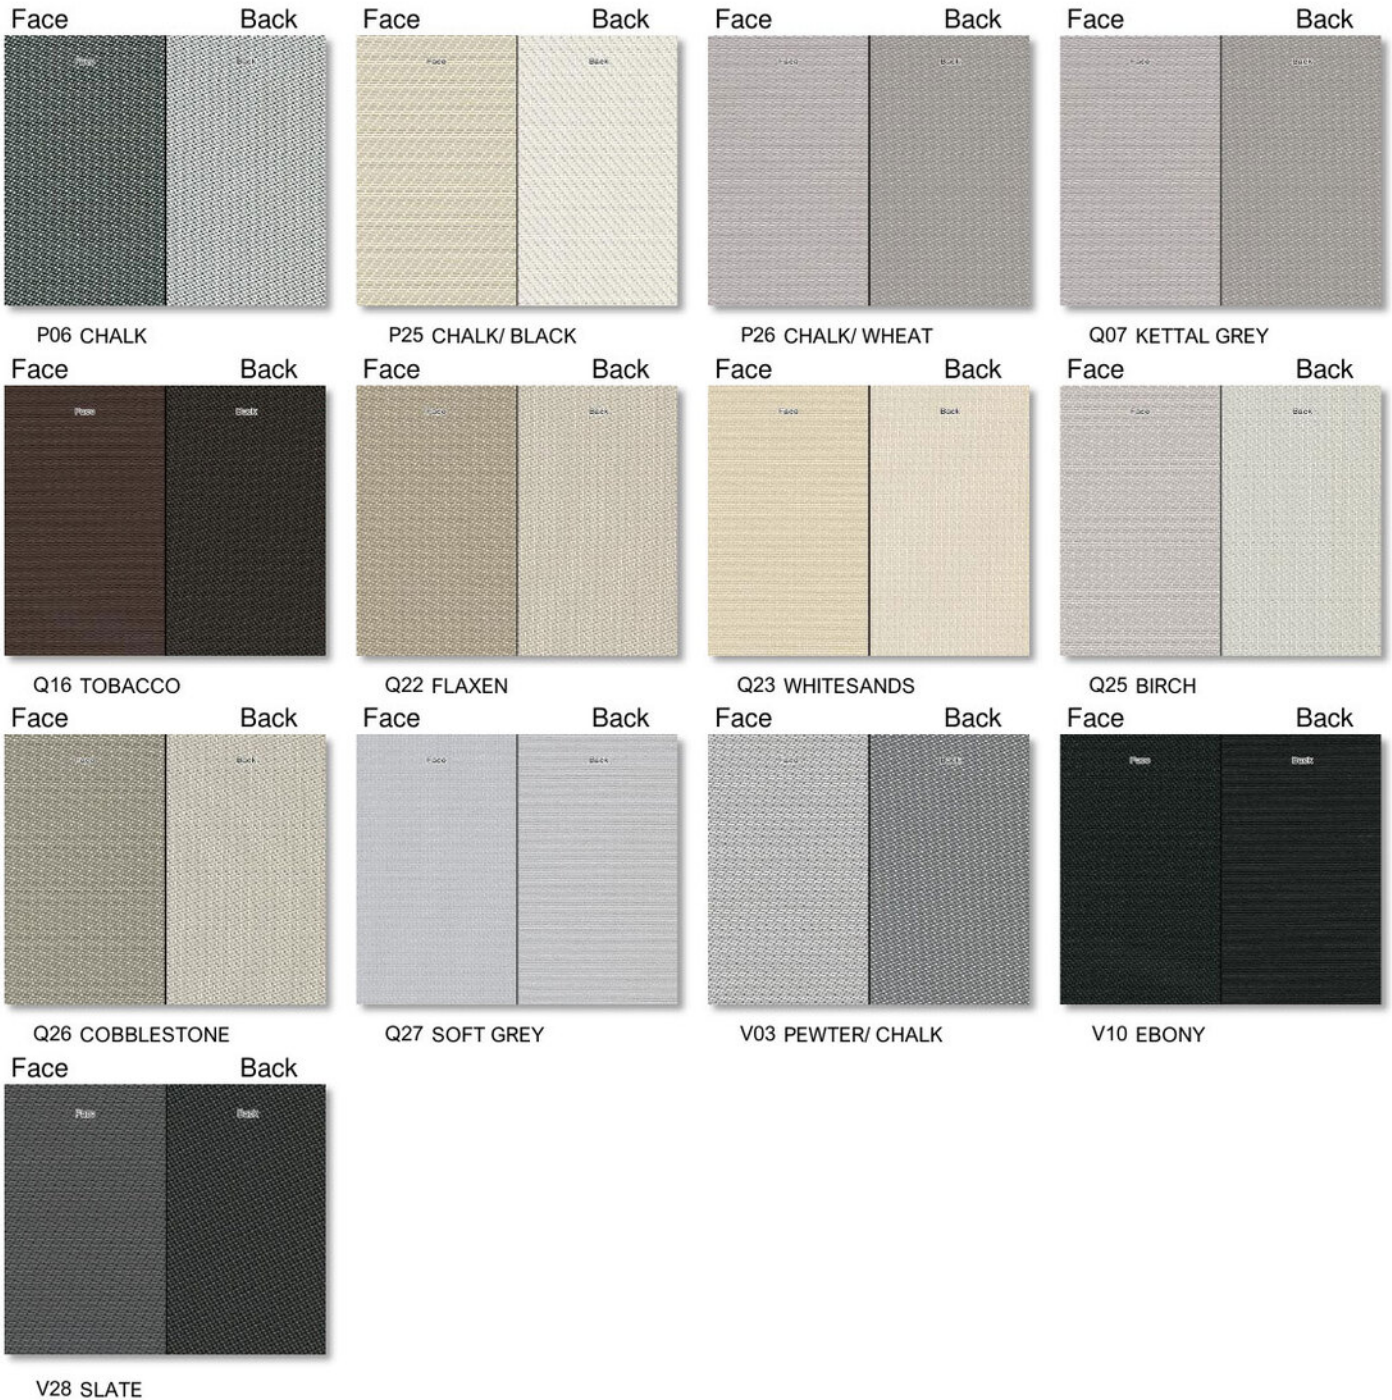

Care & Handling

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating of the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the blind down until completely dry. You can also very gently rub the fabric with a clean white pencil eraser to remove small stains.

SPECIFICATION



WIDTHS 63" and 98"

ROLL LENGTH 30 Linear Yards

FABRIC WEIGHT 14.90 oz/yd²

FABRIC THICKNESS 0.027 in.

OPENNESS ~3%

UV BLOCKAGE ~97%

COMPOSITION 17% Polyester, 83% Vinyl on Polyester

WARRANTY 5-Years Exterior, 10-Years Interior

**ENVIRONMENTAL
BENEFITS
BACTERIAL AND
RESISTANCE
ACOUSTICAL
PERFORMANCE
FIRE CLASSIFICATION**

Certified to GREENGUARD and GREENGUARD Gold
ASTM E 2180, ASTM G21, ASTM G22, AATCC30 Part 3,
ASTM D 3273

NRC:0.25, SAA: 0.25

California U.S. Title 19 (small scale), NFPA 701 TM#1
(small scale), NFPA 101 (Class A Rating), IBC Section
803.1.1 (Class A Rating), BS 5867 Part 2 Type B
Performance, NFPA 701 TM#2 (large scale), CAN/ ULC-
S 109 (large and small scale), CAN/CGSB2-4. 162-M80



Care & Handling

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating of the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the blind down until completely dry. You can also very gently rub the fabric with a clean white pencil eraser to remove small stains.